

Ypsilanti Food Cooperative 4KW
Evergreen Solar Installation
4.0KW Roof Mount



System Summary

This system will consist of 18 Evergreen ES-E 220-watt solar panels, EnPhase 215-watt Micro-inverters and a roof mount rack made from UniStrut. The system will be installed on the Ypsilanti Food Cooperative roof between the River Street Bakery panels and the Ypsilanti Food Cooperative's Sanyo solar panels.

Contact/Shipping Information

The billing address for this project is


Ypsilanti Food Cooperative
c/o Corinne Sikorski – Store manager
312 River Street
Ypsilanti, MI 48198
Phone: 734-483-1520
Email: corinne@ypsifoodcoop.org

Technical questions should be directed to


SolarYpsi.org
c/o Dave Strenski
Phone: 734-480-1587
Email: Dave@Strenski.com

System Line Diagram

This system will consist of 18 Evergreen ES-E 220-watt solar panels with EnPhase 215-watt Micro-inverters wired in parallel with 5 wires, 3 hot, 1 neutral, and 1 ground.

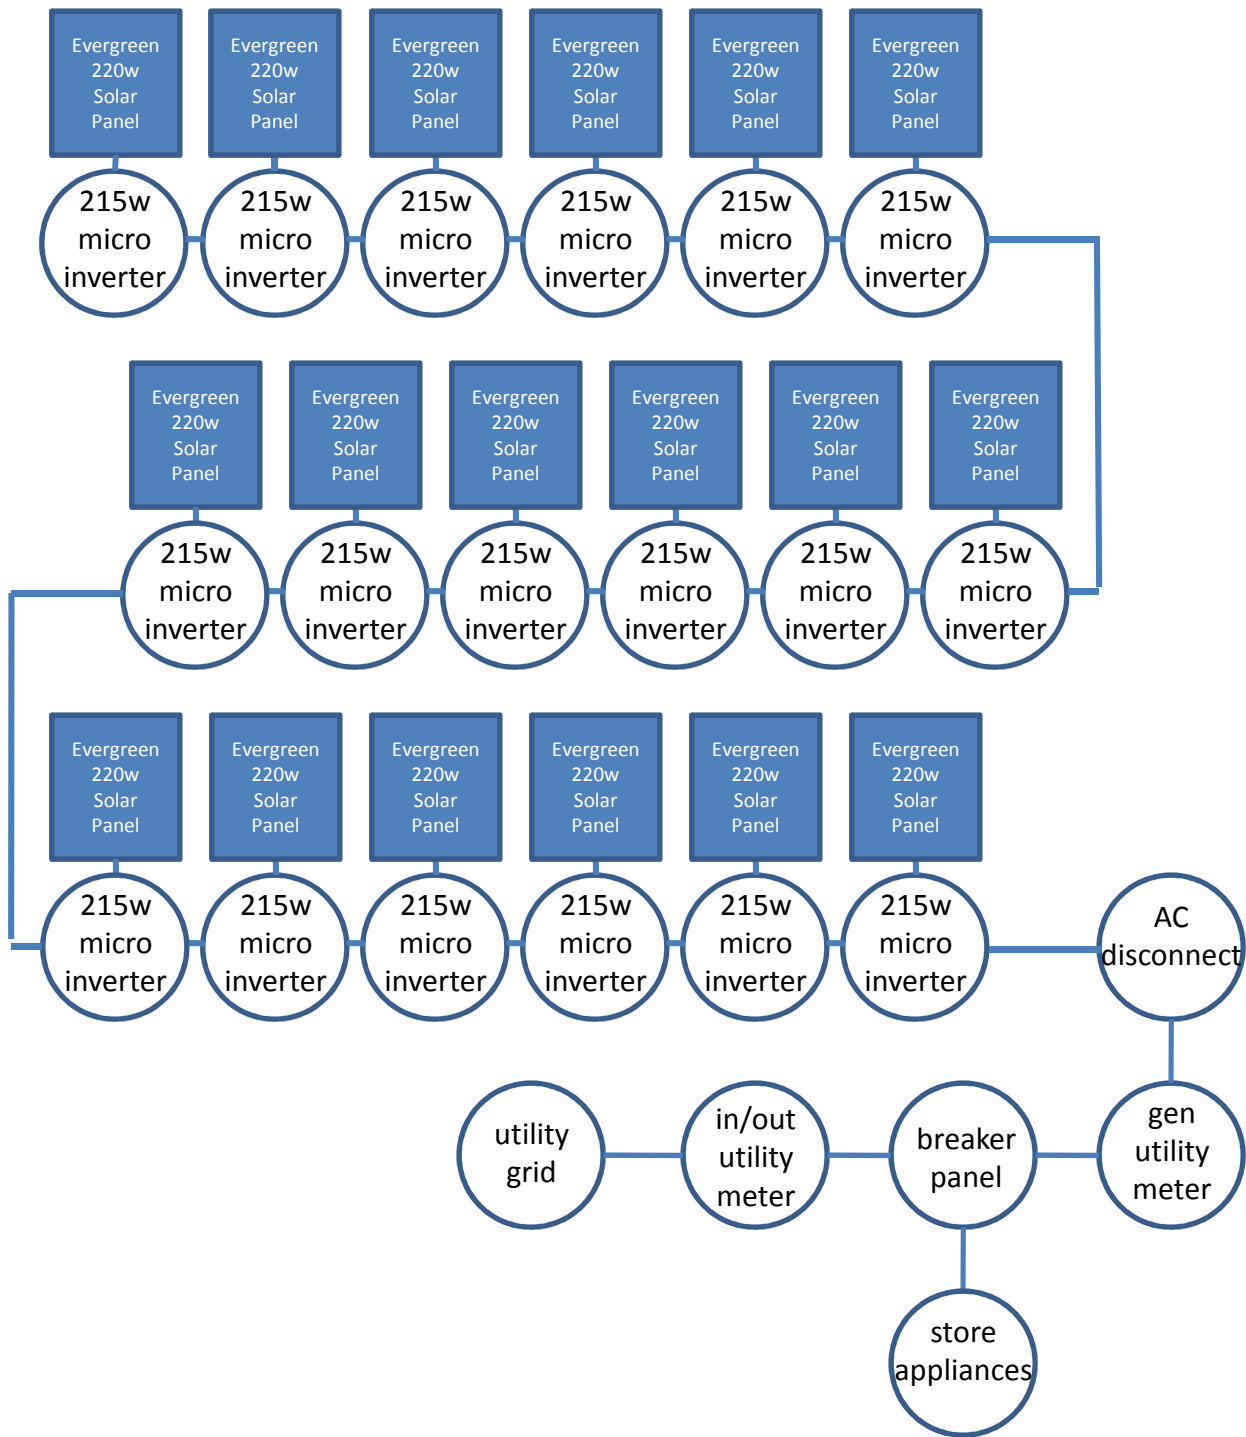

System Schematic

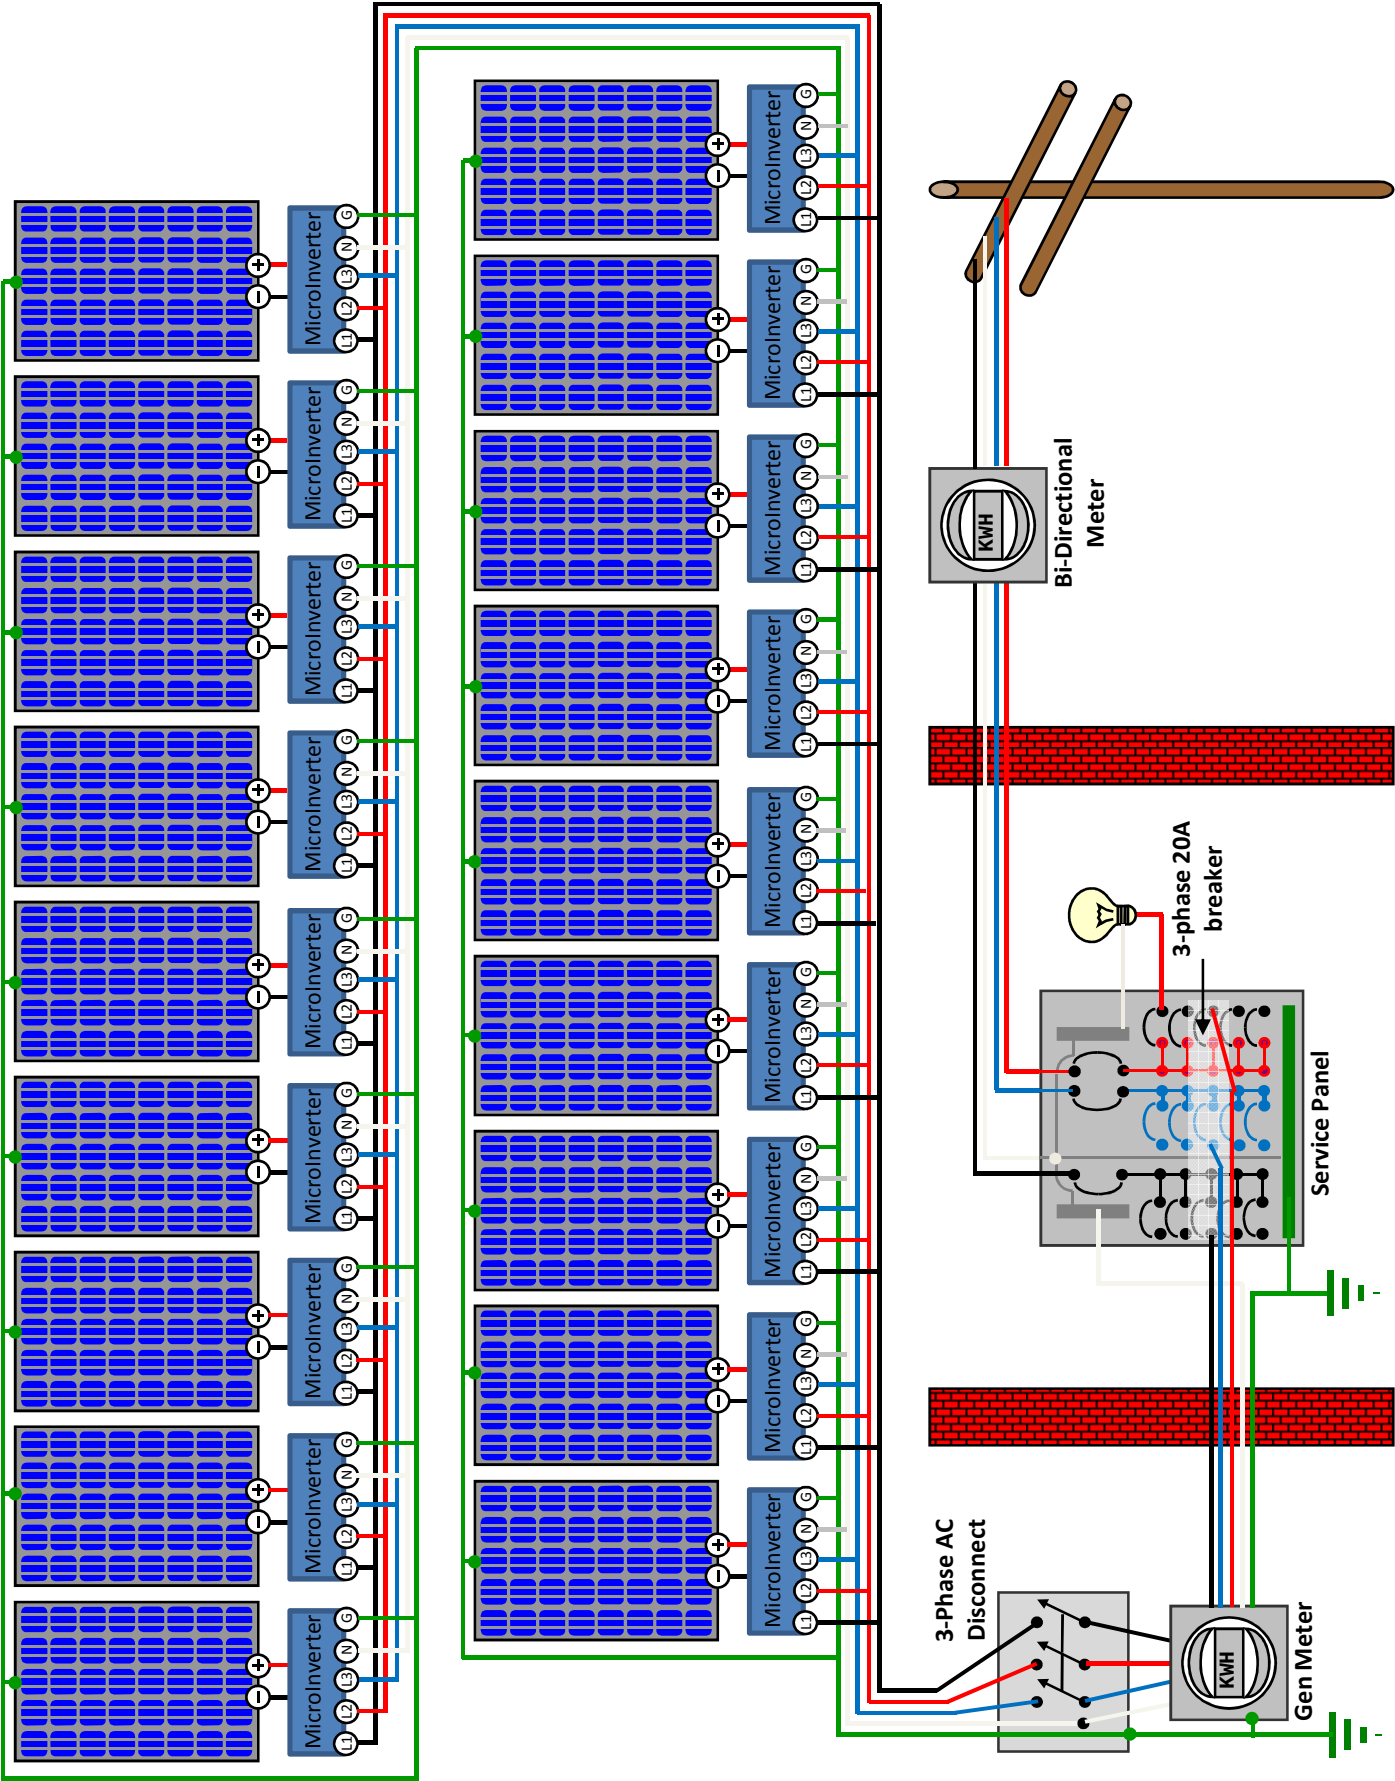

System Parts List

Part	Quantity	\$/unit	Total
Panels/Inverter			
Evergreen ES-E 220-watt solar panels	18		\$ 3,378.80
EnPhase 215-watt micro-inverter	18		
Enphase Communication Gateway	1		
Rack Top Clamps	18 sets		
Shipping sales tax	1		\$ 4,031.76
Rack			
Unistrut Material	1		\$ 1,611.84
Concrete block	40	\$3.00	120.00
Tie down cables and hardware	2	\$30.00	\$ 60.00
Grounding			
Grounding rod, needed to ground the rack	1	\$15.00	\$ 15.00
Grounding wire, 500 feet spool	1	\$200.00	\$ 200.00
Lighting arrestor, one for each string	3	\$60.00	\$ 180.00
Wiring			
AC disconnect	1	\$50.00	\$ 50.00
10 gage, THHN stranded wire (red) 500'	1	\$100.00	\$ 100.00
10 gage, THHN stranded wire (black) 500'	1	\$100.00	\$ 100.00
10 gage, THHN stranded wire (green) 550'	1	\$100.00	\$ 100.00
Conduit, conduit connectors 1"x10'	10	\$5.00	\$ 50.00
Permits			
Building permit	1	\$100.00	\$ 100.00
Electrical permit	1		
HDC permit	1	20.00	\$ 20.00
DTE Energy co-generation permit	1	\$100.00	\$ 100.00
Total			\$10,217.40
			\$2.55/watt
30% Federal tax credit			\$(3,065.22)
Actual cost			\$ 7,152.18
			\$1.79/watt

Solar Installation

$$1 \text{ sq} = 3''$$

P2110

Wind
force

P2452

knee brace

82227

Side View

A

$$\begin{array}{r} 18.69 \\ 62.9 \\ \hline 37.46 \end{array}$$

$$= 329.7 \text{ sq. ft.}$$

Rack Base

67

120


51.7

-73.6

102


System Location (312 River Street)



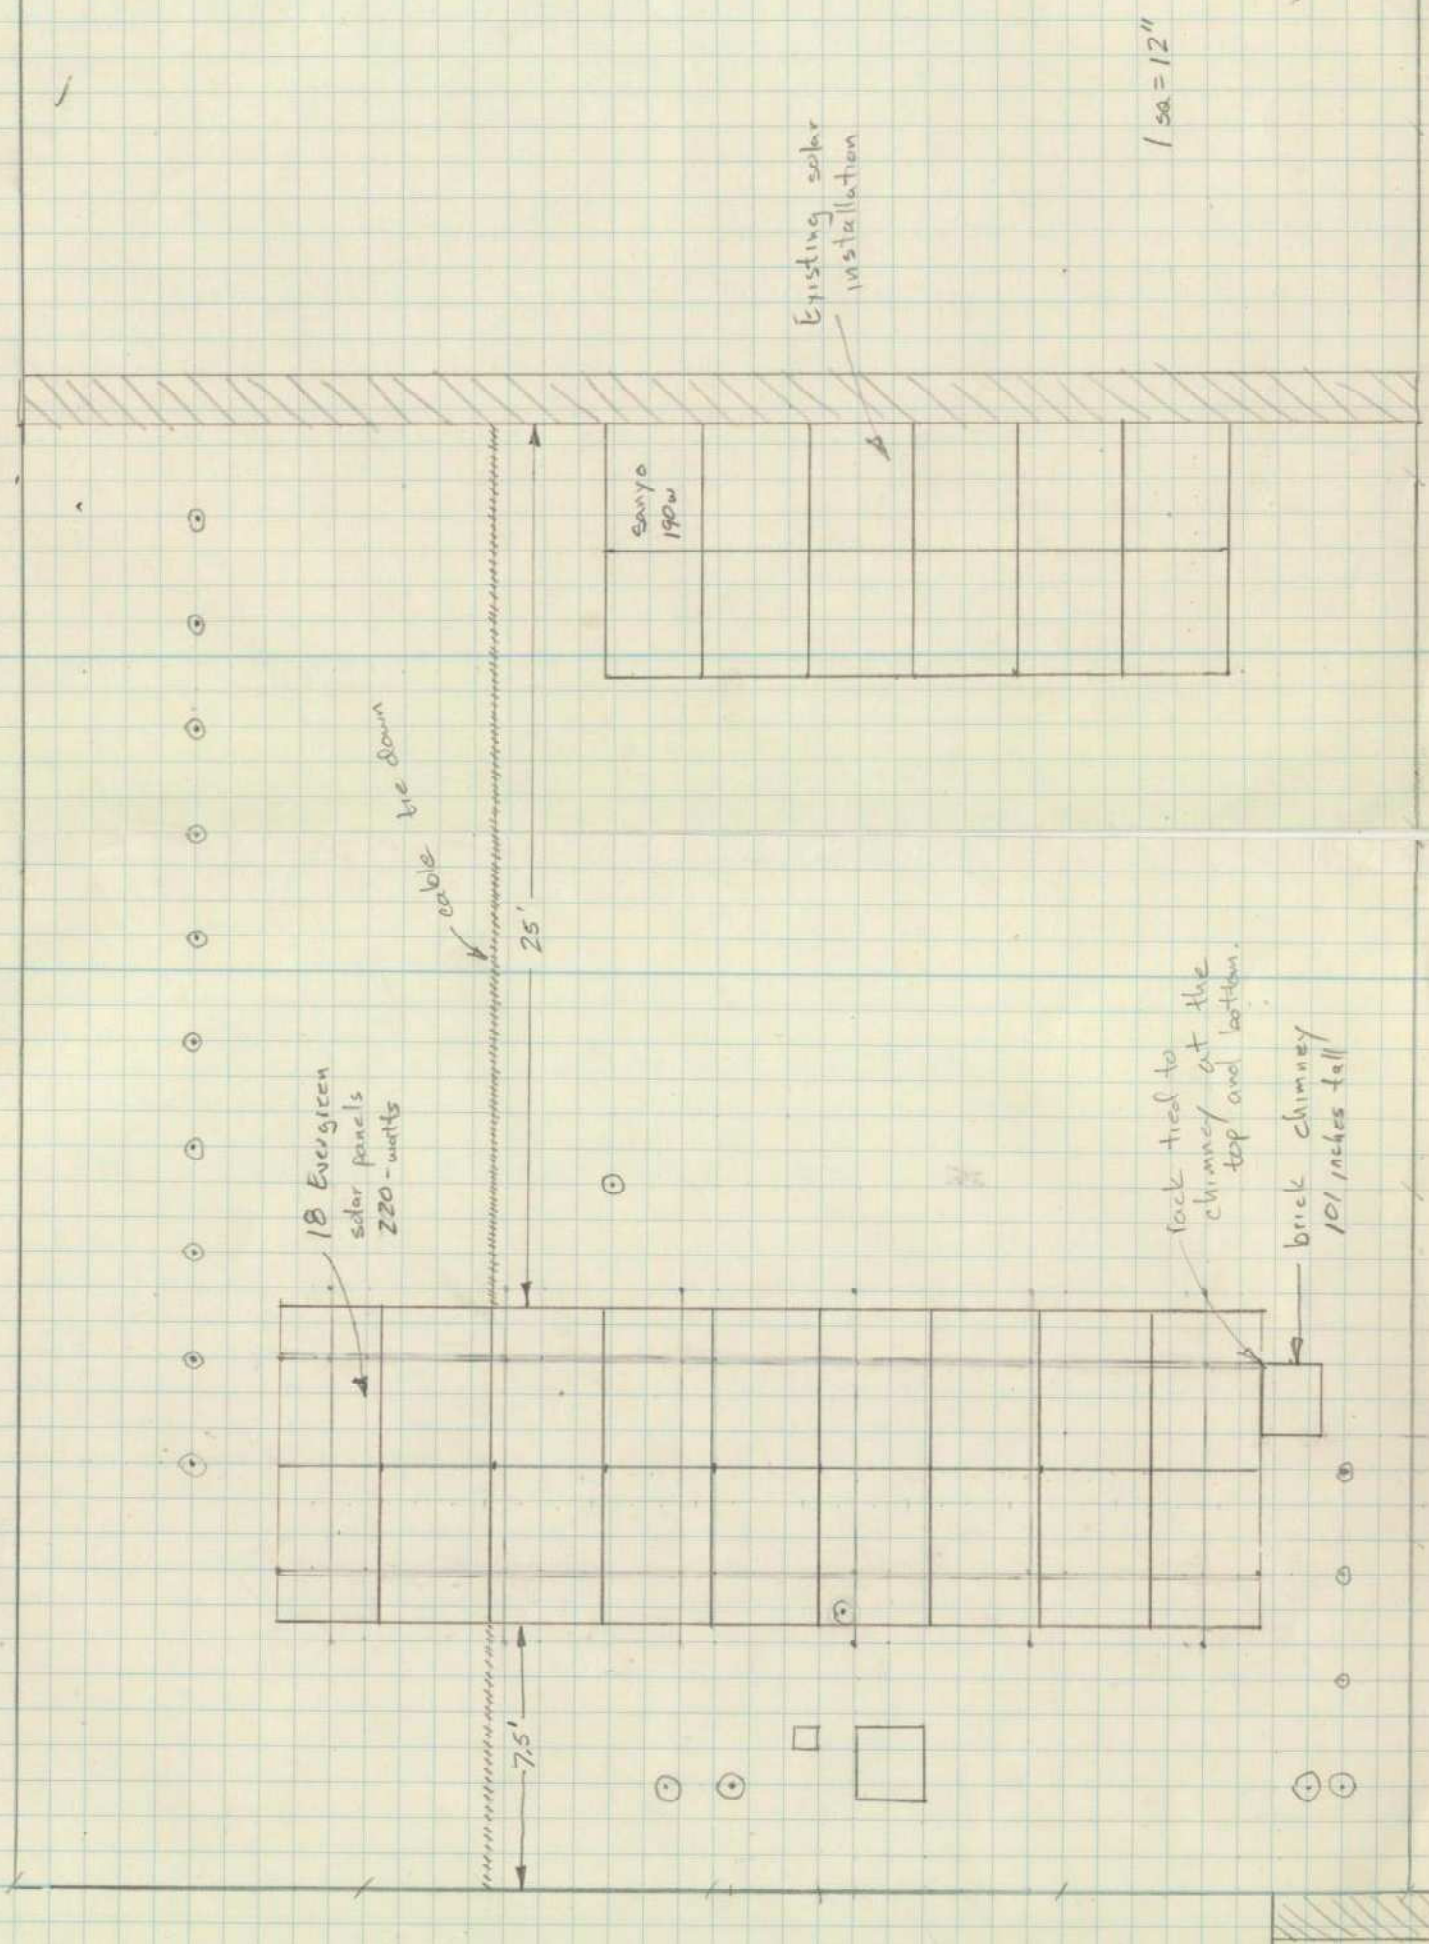

1 sq = 12"

North

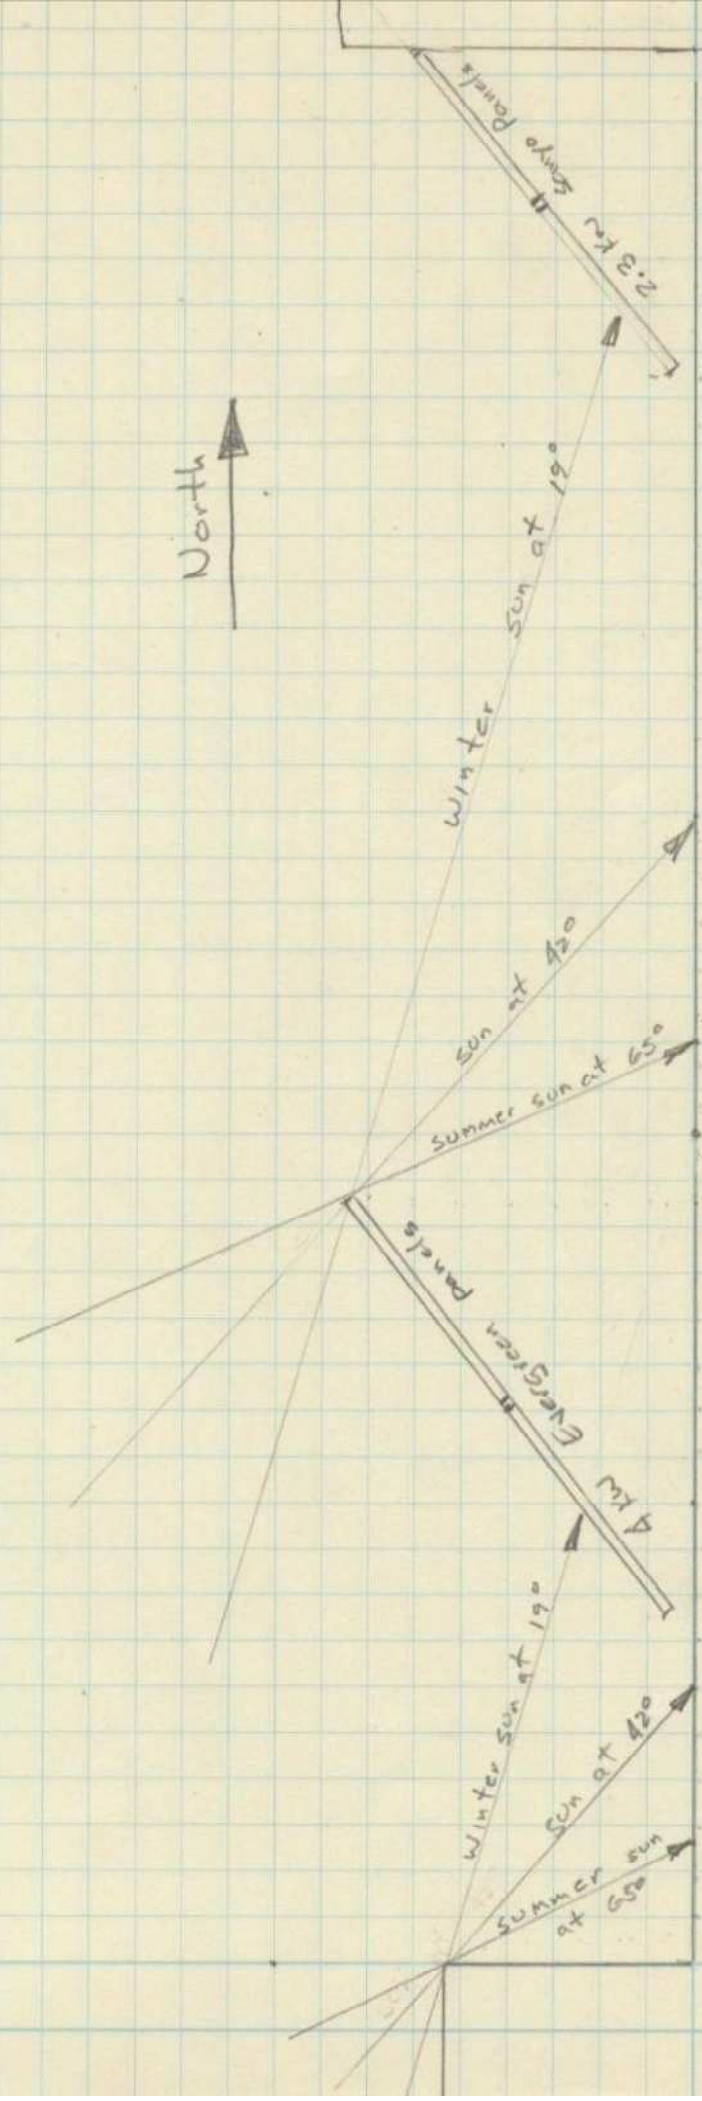

ES-E SERIES

photovoltaic panels

210, 215, 220 & 225 W

evergreensolar.

CERTIFIED FOR COASTAL INSTALLATIONS

MORE electricity

Our ES-E series panels have one of the best power tolerances in the industry ($-0/+6$ W) and consistently deliver more electricity than competitors in field tests.

POSITIVE POWER TOLERANCE¹

The rated power is the minimum, so you never get less power than you pay for.

INDEPENDENTLY VERIFIED POWER²

Four independent test labs regularly check panel power to make sure you get the power we promise.

ANTI-REFLECTIVE GLASS³

Delivering 2–3% more electricity compared to panels with standard glass.

TEMPERATURE RATINGS OVER 90%³

Maintaining up to 4% higher output than most other crystalline silicon panels under hot conditions.

MICRO-INVERTER COMPATIBLE³

Panel voltage compatible with state-of-the-art micro-inverters used to improve performance of residential systems.

LESS impact

Evergreen Solar String Ribbon® panels have the smallest carbon footprint and fastest energy payback of any silicon-based solar panel ever made.

SMALLEST CARBON FOOTPRINT⁴

Our String Ribbon® wafers are made with a fraction of the emissions that result from making conventional silicon panels.

12-MONTH ENERGY PAYBACK⁴

Our panels begin generating truly clean electricity faster than any other silicon-based panel on the market.

100% CARDBOARD-FREE REUSABLE PACKAGING

Reduces disposal costs and on-site manpower while eliminating tons of landfill.



¹ Guaranteed upon initial delivery of the panel to the customer; maximum power up to 4.00W above nameplate rating. ² Power regularly calibrated by taking the straight average of test data from NREL, TÜV Rheinland PTL, TÜV Rheinland Cologne and Fraunhofer ISE. ³ Based on comparing PTC/STC ratings of major competing multi-crystalline silicon brands.

⁴ Evaluation completed by the Energy Research Foundation of the Netherlands (ECN), May 2009.

STRING RIBBON® SOLAR PANELS OFFERING EXCEPTIONAL PERFORMANCE AND INDUSTRY-LEADING ENVIRONMENTAL CREDENTIALS. IN SHORT, MORE ELECTRICITY AND LESS IMPACT.

All Evergreen ES-E panels come with a 10 year workmanship and 25 year limited power warranty. For full details see the Evergreen Solar Limited Warranty available upon request or online. This product is designed to meet cUL 1703, UL 4703, UL Fire Safety Class 0, IEC 61215 Ed.2, IEC 61730 Class A and IEC 61701 (salt mist corrosion) standards. Evergreen Solar and String Ribbon are registered trademarks of Evergreen Solar, Inc. Evergreen Solar's wafer manufacturing technology is patented in the United States and other countries. Copyright © Evergreen Solar, Inc 2011.



ELECTRICAL characteristics

Standard Test Conditions (STC)¹

	ES-E-210 -103 ²	ES-E-215 -103 ²	ES-E-220 -103 ²	ES-E-225 -103 ²	
P_{mp}^2	210	215	220	225	W
$P_{tolerance}$	-0/+4.99 (-0/+2.4)	-0/+4.99 (-0/+2.3)	-0/+4.99 (-0/+2.3)	-0/+4.99 (-0/+2.2)	W (%)
$P_{mp,max}$	214.99	219.99	224.99	229.99	W
$P_{mp,min}$	210.00	215.00	220.00	225.00	W
P_{pec}^3	186.5	191.9	196.5	201.1	W
η_{min}	12.8	13.1	13.4	13.7	%
V_{mp}	28.7	29.0	29.2	29.5	V
I_{mp}	7.32	7.43	7.54	7.65	A
V_{oc}	35.4	35.6	35.9	36.1	V
I_{sc}	8.01	8.12	8.22	8.33	A

Nominal Operating Cell Temperature Conditions (NOCT)⁴

	ES-E-210 -103 ²	ES-E-215 -103 ²	ES-E-220 -103 ²	ES-E-225 -103 ²	
T_{NOCT}	45.4	45.4	45.4	45.4	°C
P_{mp}	153.8	157.5	161.2	164.9	W
V_{mp}	26.3	26.5	26.7	26.9	V
I_{mp}	5.88	5.95	6.03	6.11	A
V_{oc}	32.6	32.9	33.2	33.5	V
I_{sc}	6.41	6.52	6.63	6.73	A

Low Irradiance

The typical relative reduction of panel efficiency at an irradiance of 200 W/m² both at 25°C cell temperature and spectrum AM1.5 is 0%.

Temperature Coefficients

γP_{mp}	-0.43	%/°C
βV_{mp}	-0.40	%/°C
αI_{mp}	-0.03	%/°C
βV_{oc}	-0.31	%/°C
αI_{sc}	0.05	%/°C


System Design

Series Fuse Rating ⁵	15 A
UL Rated System Voltage	600 V

1 1000 W/m², 25°C cell temperature, AM 1.5 spectrum; 2 Maximum power point or rated power; 3 At STC (PMUSA Test Condition 4: 1000 W/m², 25°C ambient temperature, 1 m/s wind speed); 4 800 W/m², 20°C ambient temperature, 1 m/s wind speed, AM 1.5 spectrum; 5 A two known as Maximum Average Current; 6 Cell color may vary due to our unique manufacturing process and due to different lot-to-lot variations of the material; 7 Per IEC 61215, when using mounting method A, please according with table 15.1 (a) drawing in 027.5 (a) drawing from each sheet data of the panel as described in the Mounting Guide for this product; 8 Per UL 705 when using long wire and connecting or three support rail according as described in the Mounting Guide for this product; 9 Per IEC 61215, * 1—labeled, o—measure in large circuit design, S—measure by (barrier) only, black lines S white back side

ELECTRICAL EQUIPMENT
CHECK WITH YOUR INSTALLER

MECHANICAL specifications

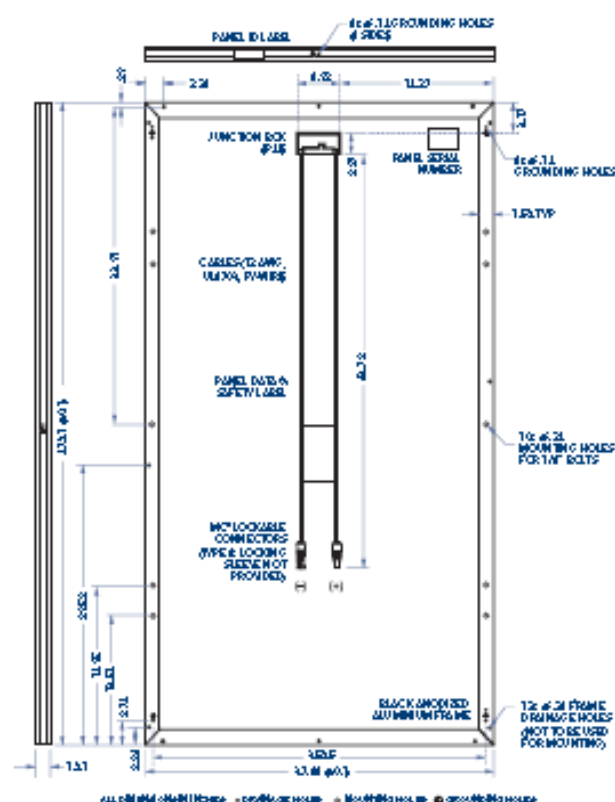

External Dimensions	67.8" x 37.5" x 1.8" / 1722.5 x 951.3 x 45 mm
Weight	42.0 lbs.
Solar Cells ⁶	120 Multi-Crystalline Silicon String Ribbon ⁸
Frame	Black Anodized Aluminium—Doubled Walled
Front Cover	Anti-Reflective Tempered Solar Glass 1/8" Thickness
Encapsulant / Back Cover	EVA / White TPE
Maximum Certified Snow Load ⁷	80 lbs./ft ²
Maximum Combined Wind & Snow Load ⁷	80 lbs./ft ²
Hailstone Impact Test ⁹	Ø1" (25 mm) ice ball at 52 miles/h (83 km/h)

The above drawing is a graphical representation of the product; for engineering quality drawings please contact Evergreen Solar. MC is a registered trademark of Multi-Contact AG. Product constructed with 120 poly-crystalline silicon String Ribbon⁸ solar cells, anti-reflective tempered solar glass, EVA encapsulant, polymer back-skin and a black anodized double-walled aluminum frame. Product packaged 28 per pallet and tested to International Safe Transit Association (ISTA) Standard 2B. All specifications in this product information sheet conform to EN 50980. See the Evergreen Solar Safety, Installation and Operation Manual, Mounting Guide and Inverter Selection Guide for further information on approved installation and use of this product.

PARTNER

ES-E-210, 215, 220, 225-103-US-010411; effective April 1st 2011

SM-0128 RevC

Evergreen Solar Inc.
www.evergreensolar.com

WORLDWIDE HEADQUARTERS

Evergreen Solar Inc.
138 Bartlett Street, Marlboro, MA 01752, USA
T +1.508.357.2221 F +1.508.220.0747
info@evergreensolar.com

CUSTOMER SERVICE Americas and Asia

Evergreen Solar Inc.
138 Bartlett Street, Marlboro, MA 01752, USA
T +1.508.357.2221 F +1.508.220.0747
sales@evergreensolar.com



The Enphase Energy Microinverter System improves energy harvest, increases reliability, and dramatically simplifies design, installation and management of solar power systems.

The Enphase System includes the microinverter, the Envoy Communications Gateway, and Enlighten, Enphase's monitoring and analysis software.

PRODUCTIVE

- Maximum energy production
- Resilient to dust, debris and shading
- Performance monitoring per module

RELIABLE

- System availability greater than 99.8%
- No single point of system failure

SMART

- Quick and simple design, installation and management
- 24/7 monitoring and analysis

SAFE

- Low voltage DC
- Reduced fire risk



M215 — MICROINVERTER TECHNICAL DATA

Input Data (DC)		M215-60-2LL-S22/S23 and M215-60-2LL-S22-NA/S23-NA (Ontario)	
Recommended input power (STC)	190 - 260W		
Maximum input DC voltage	45V		
Peak power tracking voltage	22V - 36V		
Operating range	16V - 36V		
Min./Max. start voltage	22V/45V		
Max. DC short circuit current	15A		
Max. input current	10.5A		
Output Data (AC)		@208 Vac	@240 Vac
Maximum output power	215W	215W	215W
Nominal output current	1.0A (arms at nominal duration)	0.9A (arms at nominal duration)	0.9A (arms at nominal duration)
Nominal voltage/range	208V/183-229V	240V/211-264V	240V/211-264V
Extended voltage/range	208V/179-232V	240V/206-269V	240V/206-269V
Nominal frequency/range	60.0/59.3-60.5 Hz	60.0/59.3-60.5 Hz	60.0/59.3-60.5 Hz
Extended frequency range	60.0/59.2-60.6 Hz	60.0/59.2-60.6 Hz	60.0/59.2-60.6 Hz
Power Factor	>0.95	>0.95	>0.95
Maximum units per 20A branch circuit	25 (three phase)	17 (single phase)	17 (single phase)
Maximum output fault current	1.05 Arms, over 3 cycles; 25.2 Apeak, 1.74ms duration		
Efficiency			
CEC weighted efficiency			96.0%
Peak inverter efficiency			96.3%
Static MPPT efficiency (weighted, reference EN50530)			99.6%
Dynamic MPPT efficiency (fast irradiation changes, reference EN50530)			99.3%
Night time power consumption			46mW
Mechanical Data			
Ambient temperature range	-40°C to + 65°C		
Operating temperature range (internal)	-40°C to + 85°C		
Dimensions (WxHxD)	17.3 cm x 16.4 cm x 2.5 cm (6.8" x 6.45" x 1.0")*		
Weight	1.6 kg (3.5 lbs)		
Cooling	Natural convection - No fans		
Enclosure environmental rating	Outdoor - NEMA 6		
			* without mounting bracket
Features			
Compatibility	Pairs with most 60-cell PV modules		
Communication	Power line		
Warranty	25-year limited warranty		
Monitoring	Free lifetime monitoring via Enlighten software		
Compliance	UL1741/IEEE1547, FCC Part 15 Class B CAN/CSA-C22.2 NO. 0-M91, 0.4-04, and 107.1-01		

Enphase Energy, Inc.

201 1st Street

Petaluma, CA 94952


Phone: 877-797-4743

Fax: 707-763-0784

info@enphaseenergy.com

<http://www.enphase.com>

142-00010 Rev03

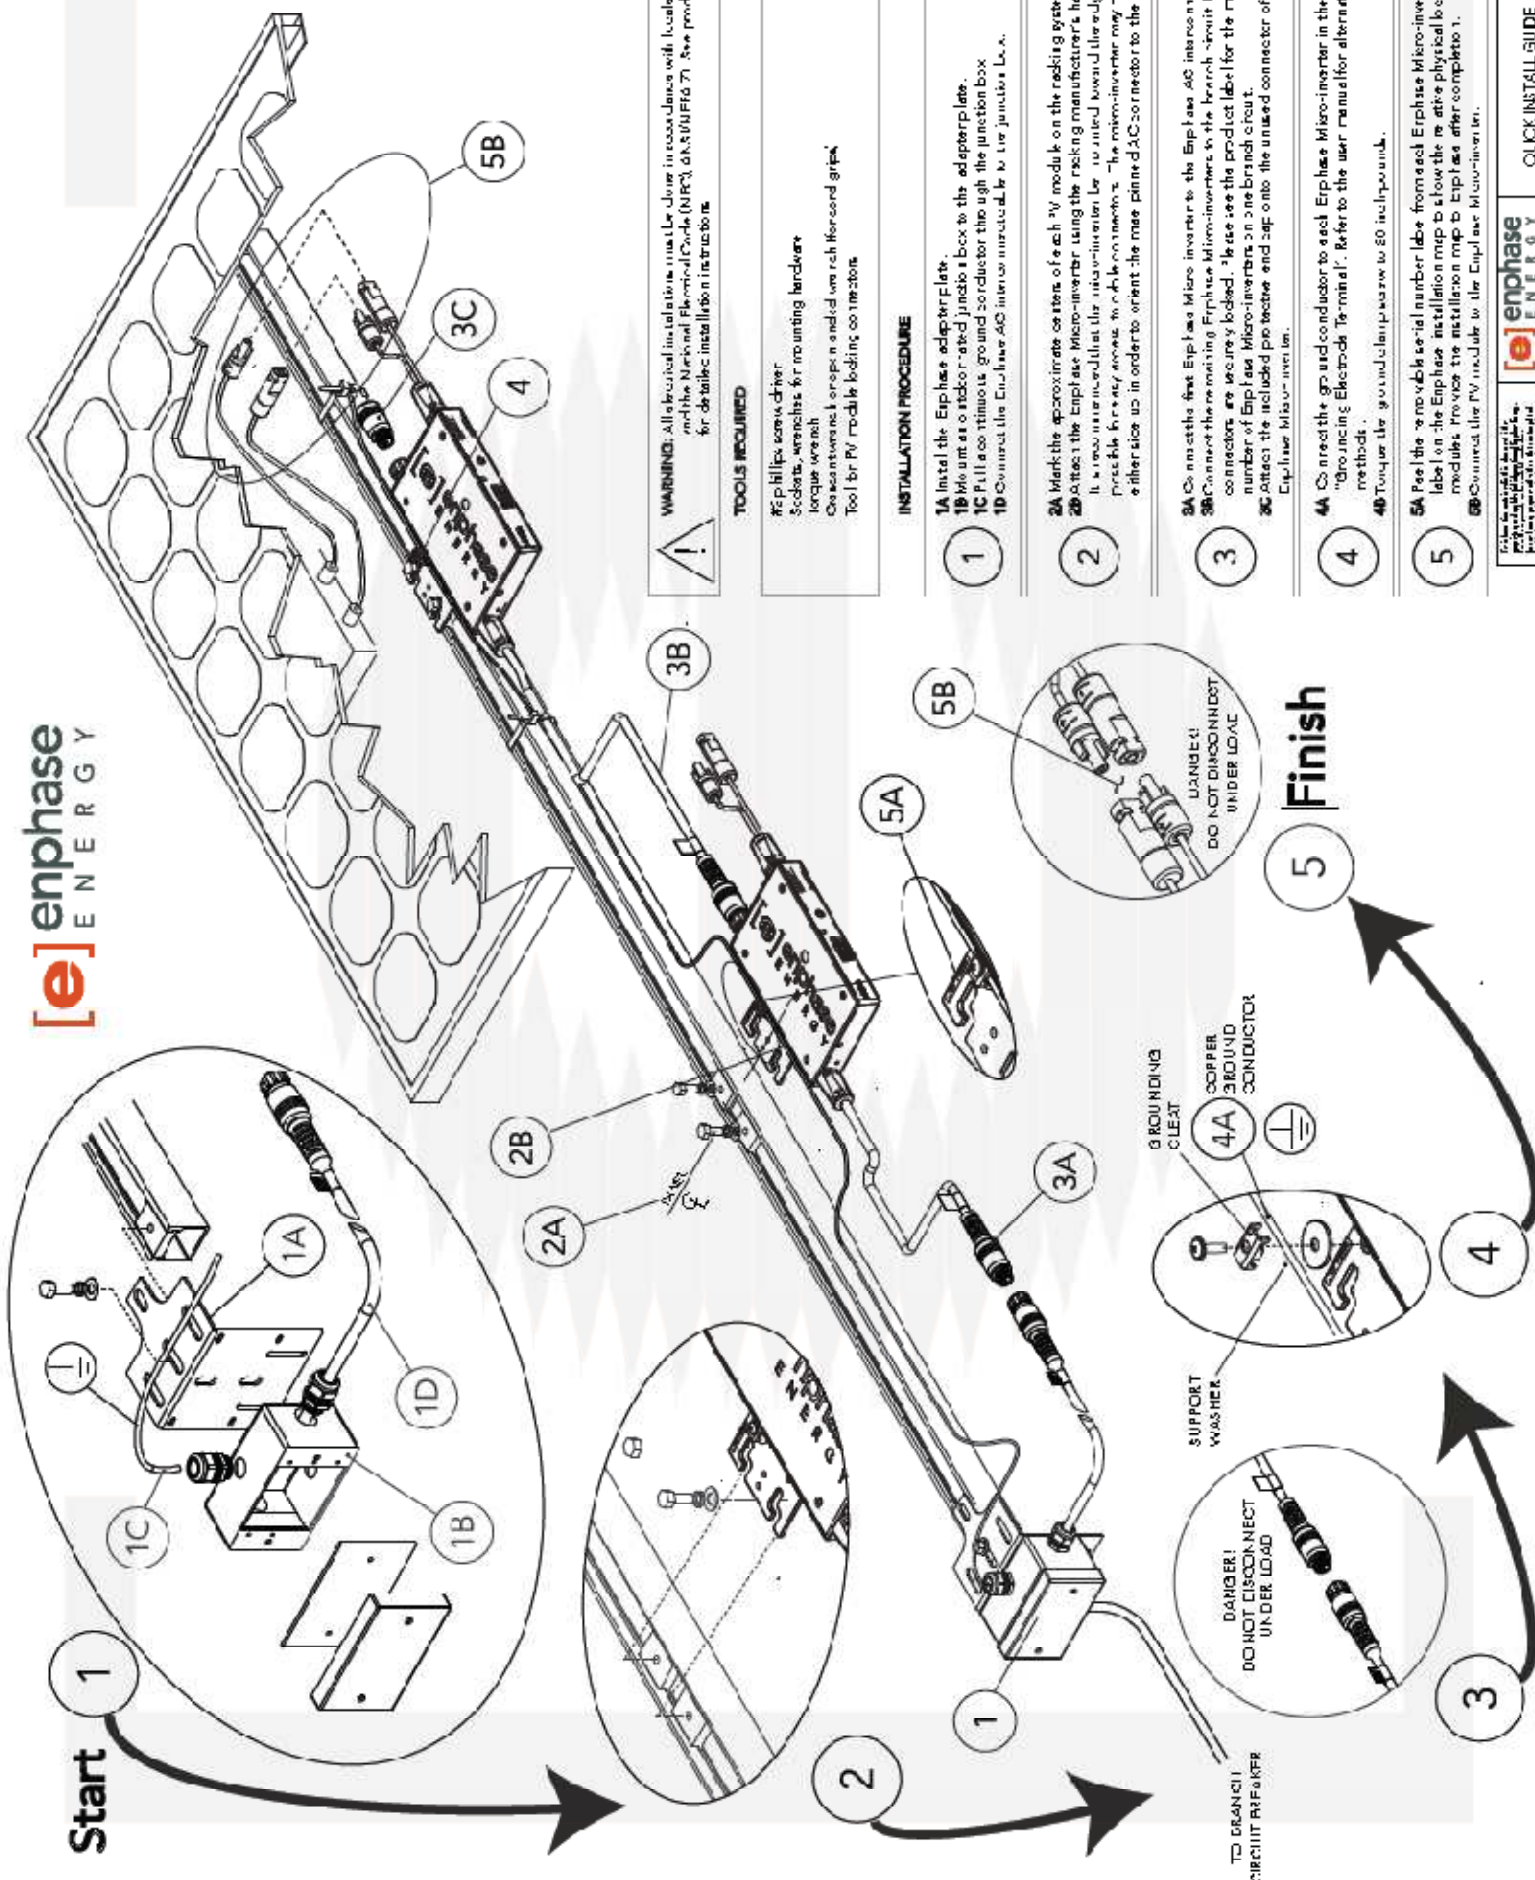

Start 1

2

3

4

5

Finish

WARNING: All electrical installations must be done in accordance with local electrical codes and the National Electrical Code (NEC) (ANSI/NFPA 70). See product manual for detailed installation instructions.

TOOLS REQUIRED

- #2 Phillips screw driver
- Sockets, wrenches for mounting hardware
- Torque wrench
- Overhead mounting system and overhead grip
- Tool for PV module bolting connections

INSTALLATION PROCEDURE

1. Install the Enphase adapter plate.
Mount the adapter plate to the racking system using the mounting hardware.
Pull the conductor through the junction box.
Connect the Enphase AC input wires to the junction box.
2. Mark the approximate center of each PV module on the racking system.
Mount the Enphase Micro-Inverter using the racking manufacturer's hardware.
It is recommended that the micro-inverter be installed toward the edge of the array if possible for easy access to the connections. The micro-inverter may be installed with either side up in order to orient the main pinned AC conductor to the grid connection.
3. Connect the first Enphase Micro-Inverter to the Enphase AC input wires.
Connect the remaining Enphase Micro-Inverters to the Enphase AC input wires. Ensure that the connections are securely bolted. Please see the product label for the maximum allowable number of Enphase Micro-Inverters on a single branch circuit.
Connect the included protective end cap onto the unused connector of the last Enphase Micro-Inverter.
4. Connect the ground conductor to each Enphase Micro-Inverter in the location marked "Grounding Electrode Terminal". Refer to the user manual for alternative grounding methods.
5. Peel the removable label number 100 from each Enphase Micro-Inverter and place the label on the Enphase installation map to show the relative physical location of the PV modules. Review the installation map to Enphase after completion.

GROUNDING CLEAT

COPPER BROUND CONDUCTOR

4A

GROUNDING CLEAT

4

SUPPORT WASHER

3

GROUNDING CLEAT

4A

GROUNDING CLEAT

4

DANGER!

DO NOT DISCONNECT UNDER LOAD

3

GROUNDING CLEAT

4A

GROUNDING CLEAT


4

Enphase Energy
16750 SW 20th Ave, Suite 200
Miami, FL 33199
1-800-451-7343

[e]enphase
ENERGY
enphaseenergy.com

ENPHASE
ENERGY
ENPHASE

ENPHASE
ENERGY
ENPHASE

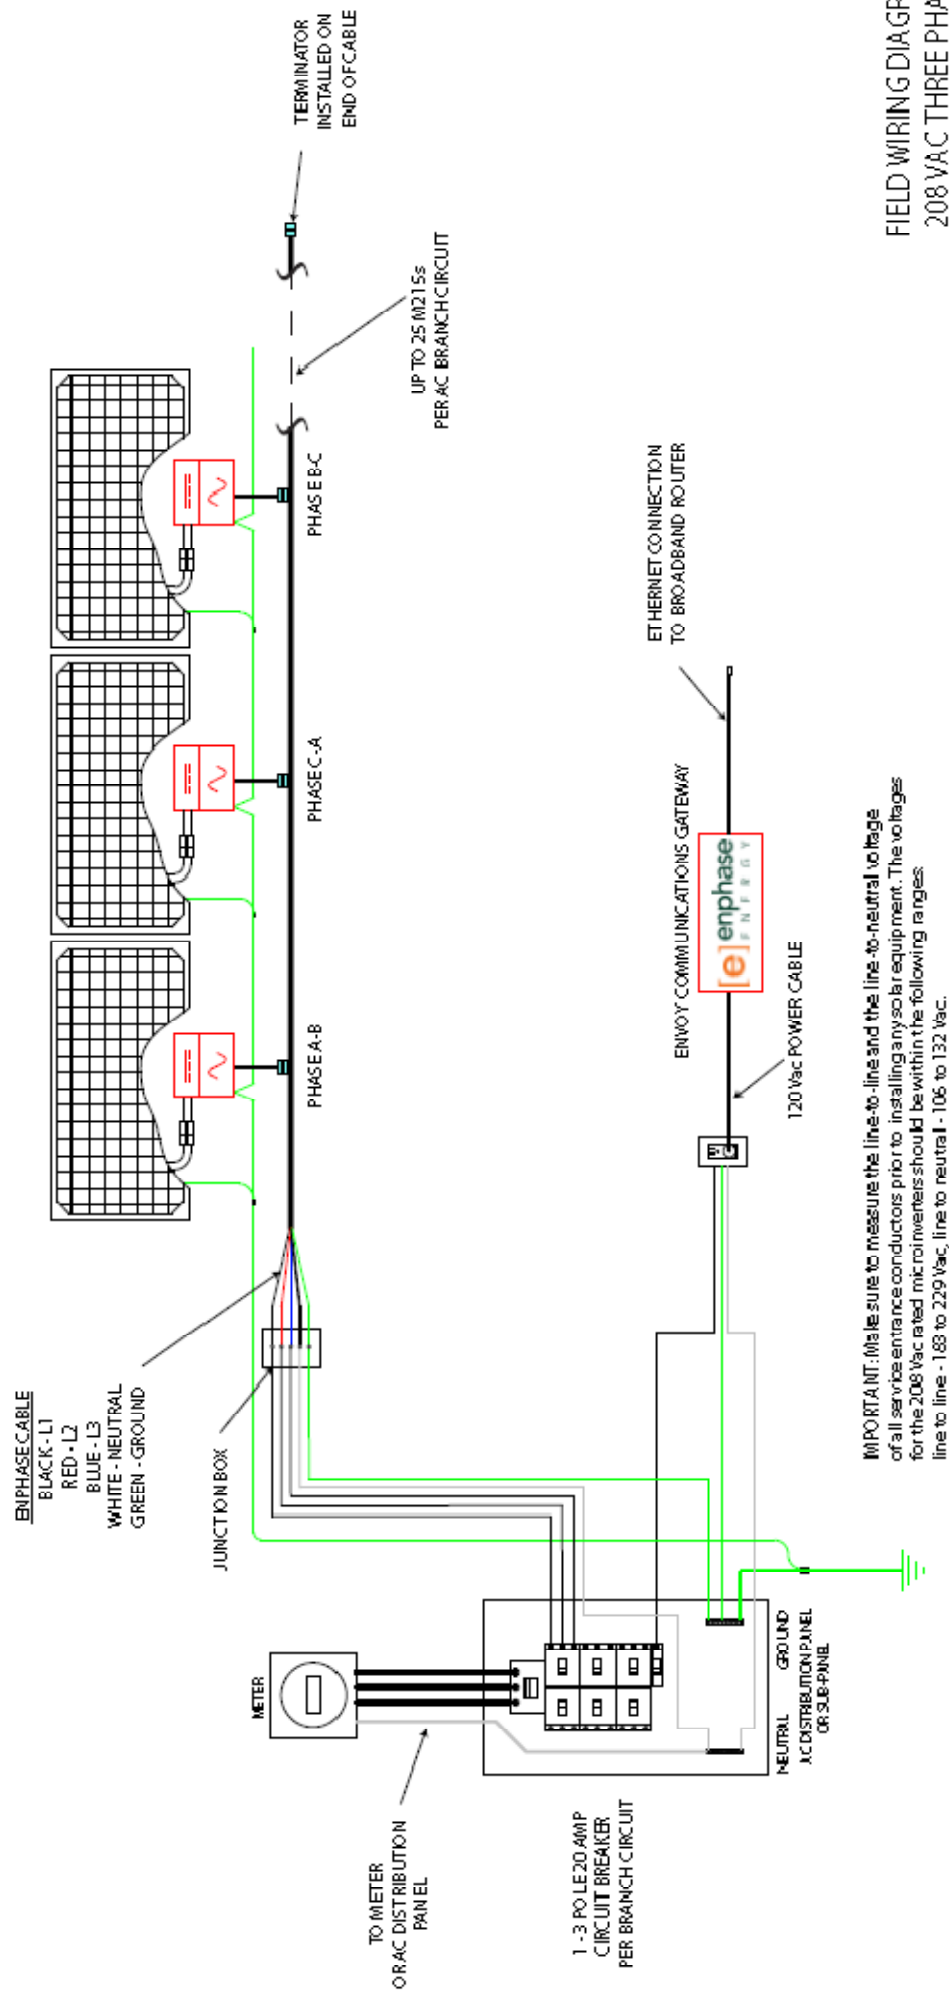



511 NE 15th Street
Miami, FL 33132

Phone: (305) 536-9917
Fax: (305) 371-2353

Sales Order

Date	S.O. No.
11/15/2011	20092

Name / Address
Dave Strenski 323 Oak Street Lanti MI 48198

Ship To
Dave Strenski 323 Oak Street Lanti, MI 48198

P.O. No.	Rep	Payment Method	Ship Via	Ship Date	FOB
	VA	Credit Card	Freight	11/15/2011	Miami
Item	Description		Ordered	Price Each	Amount
ES-E-220-FC3B	Evergreen ES-E 220W Black Frame - ETL-CE-CEI "B"		18	171.60	3,088.80
Shipping & Hand...	Shipping & Handling			290.00	290.00



UNISTRUT®

The Original Metal Framing

QUOTE

Date: June 30, 2012

1275 Hillsmith Dr.
Cincinnati, OH 45215
Phone: 800-586-4787 Fax: 800-465-8039
mikehoff@unistrut.biz

VISIT OUR NEW WEBSITE:
WWW.UNISTRUT.BIZ

TO Strensky-

SALESPERSON	JOB	PAYMENT TERMS	DUE DATE
Mike Hoff		Due on receipt	



QTY	DESCRIPTION	UNIT PRICE	LINE TOTAL
260'	P1000T 20HG (Cut to size)	2.75	
120'	P3300 20HG	2.50	
8	P1067 EG	4.52	
12	P2227 EG	13.67	
12	P2110 EG	5.22	
10	P2452 EG	17.00	
124	HHCS050094 EG	.25	
124	P3013 EG	.85	
24	HHCS037100 EG	.20	
24	P3008 EG	.85	
24	HFLW037 EG	.10	

All fittings would be hot-dipped equivalent cold galvanized sprayed. Channel would be hot-dipped and the cut ends cold galvanized.

SUBTOTAL

SALES TAX

TOTAL

Quotation prepared by: Michael Hoff _____

This is a quotation on the goods named, subject to the conditions noted below: This quote does NOT include taxes, applicable freight charges unless specifically mentioned. Terms are good for 90 days from time of issue. Please call with any questions: 1-800-586-4787

To accept this quotation, sign here and return: _____

THANK YOU FOR YOUR BUSINESS!

s.u.r energy

Suburban - Urban - Rural

Design, Sales, and Installation of Renewable
Energy Systems

SOLAR ELECTRIC COMPONENTS - PROPOSAL

November 17, 2011

Attn: Dave Strenski
stren@cray.com

Dave:

We are pleased to offer the grid tied solar electric (PV) components described below:

- 18 Enphase M215, MC4 connectors (for Evergreen modules)
- 1 Enphase Envoy Communication Gateway
- 32 Unirac Mid Clamps, size F (for Evergreen)
- 8 Unirac End Clamps, size F (for Evergreen)
- 2 Hours labor
- Shipping
- Tax (if it's for a non-profit, this can be waived)

Solar Electric Components as listed above				
Wattage	Purchase Price	6% MI Sales Tax	Total	Dollars/Watt
N/A	\$3,806.72	\$225.04	\$4,031.76	N/A

I. Location of Building	At (location) <u>312 River Street</u> Zoning Dist. _____ Between _____ Cross Street _____ and _____ Michigan Avenue Subdivision _____ Depot Town _____ Lot _____ Block _____ Lot Size _____					
Please Print Clearly						
II. Type And Cost of Building - All applicants complete parts A - D						
A. TYPE OF IMPROVEMENT			D. PROPOSED USE - For "Wrecking", most recent use			
1. ____ New building 2. <u>X</u> Addition (If residential, enter number of new housing units added, if any, in Part D-13.) 3. ____ Alteration (See 2 above) 4. ____ Repair, replacement 5. ____ Wrecking (If multifamily residential, enter number of units in building in Part D-13.) 6. ____ Moving (relocation) 7. ____ Foundation only			Residential 12. ____ One Family 13. ____ Two or more family (Number of units) _____ 14. ____ Transient hotel, motel, or dormitory (Number of units) _____ 15. ____ Garage 16. ____ Carport 17. ____ Other - (Please specify) _____ _____ _____ _____ _____			
B. OWNERSHIP						
8. <u>X</u> Private (individual, corporation, nonprofit institution, etc.)			18. ____ Amusement, recreational			
9. ____ Public (federal, state, or local government)			19. ____ Church, other religious			
			20. ____ Industrial			
			21. ____ Parking garage			
			22. ____ Service station, repair garage			
			23. ____ Hospital, institutional			
			24. ____ Office, bank, professional			
			25. ____ Public utility			
			26. ____ School, library, educational			
			27. <u>X</u> Stores, mercantile			
			28. ____ Tanks, towers			
			29. ____ Other - (Please specify) _____ _____ _____ _____			
C. COST			Non-residential - Describe in detail proposed use of buildings, e.g., food processing plant, machine shop, laundry building at hospital, elementary school, secondary school, college, parochial school, parking garage for department store, rental office building, office building at industrial plant. If use of existing building is being changed, enter proposed use.			
10. Cost of improvement <i>To be installed but not included in the above cost</i>			(Omit cents) \$			
a. Electrical			\$10,217			
b. Plumbing			\$0	Grocery Store.		
c. Heating, air conditioning			\$0			
d. Other (elevator, etc.)			\$0			
11. Total cost of improvement			\$10,217			
III. Selected Characteristics of Building - For new buildings and additions, complete Parts E-L; for wrecking, complete only Part J, for all others skip to Section IV.						
E. PRINCIPAL TYPE OF FRAME			G. TYPE OF SEWAGE DISPOSAL		J. DIMENSIONS	
30. ____ Masonry (wall bearing)			40. ____ Public or private company		48. Number of stories	
31. ____ Wood frame			41. ____ Private (septic tank, etc.)		49. Total sq. feet of floor area, all floors, based on ext. dimensions.	
32. ____ Structural steel			H. TYPE OF WATER SUPPLY		50. Total land area, sq. feet	
33. ____ Reinforced concrete			42. ____ Public or private company		K. NUMBER OF OFF STREET PARKING SPACES	
34. ____ Other - (specify) _____			43. ____ Private (well, cistern)		51. Enclosed	
					52. Outdoors	
F. PRINCIPAL TYPE OF HEATING FUEL			I. TYPE OF MECHANICAL		L. RESIDENTIAL BUILDINGS ONLY	
35. ____ Gas			Will there be central air conditioning?		53. Number of bedrooms	
36. ____ Oil			44. ____ Yes 45. ____ No			
37. ____ Electricity			Will there be an elevator?		54. Number of bathrooms:	
38. ____ Coal			46. ____ Yes 47. ____ No		Full	
39. ____ Other - (specify) _____					Partial	

Describe in detail all work to be done on this permit application.

Note: In addition to plans, a copy of a certified survey is also required for construction of all new buildings, additions, garages, carports, pole barns, fences, sheds, parking lots, etc. Permits will not be issued without the required certified survey.

This building permit is to add 4KW of photovoltaic solar panels to the roof of the Ypsilanti Food Cooperative and tie it into the store's 3-phase electrical system. The solar panels will be mounted on a steel rack tilted at 38 degrees to the horizon and weighted down on the roof with concrete block and guide wires. The power will be run within electrical conduit down the outside of the building along the back wall and enter the building on the North-East corner. After entering the building, it will be tied into the store's main 3-phase power service panel.

IV. IDENTIFICATION – To be completed by all applicants

Name		Mailing address – (Number, street, city & state)	Zip code	Telephone
1. Owner or Lessee				
2. Contractor Info			Builder's License No.	
3. Architect or Engineer				

I hereby certify that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent, and we agree to conform to all applicable laws of this jurisdiction.

Signature of applicant	Address	Application date
------------------------	---------	------------------

DO NOT WRITE BELOW THIS LINE**V. PLAN REVIEW RECORD – For office use only**

Plan Reviews Required	Check	Plan Review Fee	Date Plans Started	By	Date Plans Approved	By	Notes
Building		\$					
Plumbing		\$					
Mechanical		\$					
Electrical		\$					
Other (specify)		\$					

VI. ADDITIONAL PERMITS REQUIRED OR OTHER JURISDICTION APPROVALS

Permit or Approval	Check	Date Obtained	Number	By	Permit or Approval	Check	Date Obtained	Number	By
Boiler					Plumbing				
Curb/Sidewalk cut					Roofing				
Elevator					Sewer				
Electrical					Sign/Billboard				
Furnace					Street Grades				
Grading					Use of public areas				
Oil burner					Wrecking				
Other (specify)					Other (specify)				

VII. VALIDATION

Building permit number		For Department Use Only	
Building permit issued			
Building permit fee	\$		
Certificate of Occupancy	\$		
Drain Tile	\$		
Plan review fee	\$		
		Use Group	
		Fire Grading	
		Live Loading	
		Occupancy Load	
			Approved by
			Date

VIII. ZONING EXAMINER'S NOTES

Is Zoning Review Required? YES NO Signature: _____ Date: _____
(If no, further review by C.E.D. is unnecessary)

Zoning District:

Current Use:

Front Yard Setback:

Side Yard Setback: _____ Side Yard Setback: _____

Rear Yard Setback: _____

Is the property located within the Historic District: YES NO Signature: Date:

Is Historic District work permit required: YES NO Signature: Date:

If yes, is Historic District work permit approved: YES NO Signature: _____ Date: _____

Is site plan review required: YES NO Signature: Date:

If yes, is site plan approved: YES NO Signature: _____ Date: _____

Permit ok to issue (Zoning compliance only): YES NO Signature: Date:

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.