



Sonali Solar


"Energy Inspired by Nature"

1.888.58.SOLAR

HOME PRODUCTS ABOUT SONALI WHY SONALI SOLAR? CONTACT US BLOG




PRODUCTS



BIPV

All Manufactured modules are tested 100% by EL (Electroluminescence)



POLYCRYSTALLINE

Our polycrystalline PV module series runs from 3W to 300W.



RESIDENTIAL/ COMMERCIAL SOLUTIONS

Sonali Solar can design and manufacture solar modules for any




CONTACT US FOR A QUOTE



info@sonalisolar.com

Call: 1.888.58.SOLAR

SS 280-290-300 Series

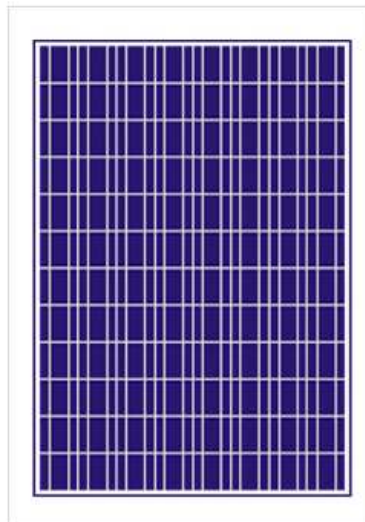

Name: SS 280-290-300 Series

Quality Product

- ▶ All Manufactured modules are tested 100% by EL (Electroluminescence) during the Production Process & Free from micro cracks.
- ▶ Our high-performance modules are highly efficient, reliable and provide optimal output. The company manufactures solar modules in compliance with global standard including MNRE, IEC 61215, 61730-1, 61730-2, 61701, UL 1703, ISO 9001:2008 & ISO 14001:2008

High Efficiency

High Module efficiency is obtaining top performance even in diffused light conditions. We are leaders in providing our customers with maximum sunlight conversion.

Application Possibilities

Residential and Commercial rooftops, Car ports, Solar Farming, Balconies, Awnings, Street Lights, Fences and Canopies.

Our Team

We have a team of qualified experts and engineers making sure that modules produce maximum power. We pride ourselves in caring for each individual customer needs with detailed attention. Our end goal is to give a highly efficient product with exceptional customer service.

Guarantee

Our product is durable and has lifetimes of 25 years warranty. Integrated manufacturing of cells & modules in one production line guarantees optimum performance.

RFID

RFID is an radio Frequency Identification Technology-enables every individual modules to be uniquely identified. We can provide RFID tag as per customer's request.

Electrical Specifications

Nominal Maximum Power (Pmax)	280W	290W	295W	300W
------------------------------	------	------	------	------

Parameter	400W	450W	500W	550W
Optimum Operating Voltage (Vmp)	36.58	36.72	37.08	37.58
Optimum Operating Current (Imp)	7.66	7.90	7.96	7.98
Open Circuit Voltage (Voc)	43.92	43.92	44.28	44.64
Short Circuit Current (Isc)	8.15	8.3	8.37	8.45

* Maximum System Voltage: 1000 V

* Measurement Power Tolerance on Power±3%, 0/+ Tolerance on Max power Available upon request.

* Under Standard Test Conditions: (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C

* Normal Operating cell Temperature (NOCT) 47±2°C

Mechanical Specification	
Module Dimensions	(1954 X 981 X 40 mm)/(76.93 X 38.62 X 1.57 inch)
Weight	21kgs / 46.3lbs
Junction Box	Protection Class IP65 with Bypass diodes
Cable & Connectors	Solar Cable 900mm length with 4.0 mm ² double Insulated Cable, Multi Contact connector
Cell Arrangement	72 (6 X 12)
Front Cover	3.2mm Tempered Glass
Encapsulate	EVA
Back Cover	Composite Sheet
Frame	Silver Matt Finished Anodized frame, Anodizing Coating Thickness ≥ 16 μm

Temperature Coefficients		Product Guarantees	
Coefficient of current α	(0.060% /°C)	Product Warranty	10 Years
Coefficient of voltage β	(-0.35% /°C)	Performance Warranty	Output of 90% for 10 years and 80% for 25 years
Coefficient of Power λ	(-0.45% /°C)	Approvals & Certificates	Complied to IEC 61215, 61730-1, 61730-2 & UL 1703 Standards by ETL

Tested Operating Conditions	
Temperature Cycling Range	(-40°C ~+ 85°C)
Humidity Freeze, Damp Heat	85%RH
Static Load	2400 Pascal

